
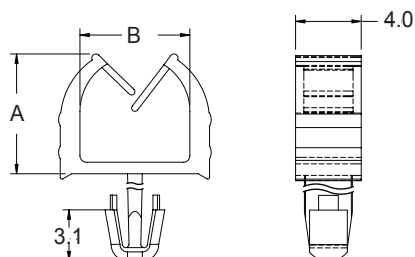


# RCCN 日成MWS型夹线套 Narrow Wire Saddle-Arrowhead

MWS-A1

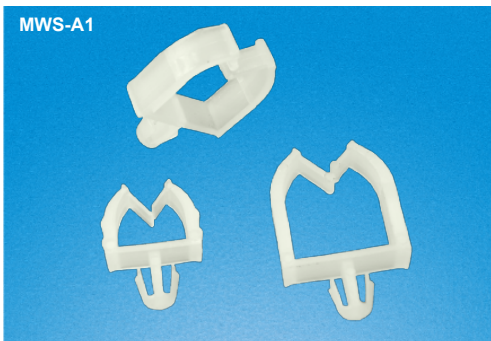

材质：UL合格之NYLON66(本色)，防火等级94V-2，绝缘性佳，不易老化。

本品与MWS-A1/B1系列区别是开孔3.5。

Material：UL approved NYLON66(natural)，fireproof 94V-2，good insulation,good aging resistant.

The difference between this product abd MWS-1A/B1 lies in the hole is 3.5


单位/Unit:mm

| 型 号<br>Item No. | A    | B   | 孔径<br>Hole dia. | 板厚<br>Board thickness | 包装<br>Packing |
|-----------------|------|-----|-----------------|-----------------------|---------------|
| MWS-A-7.3       | 7.3  | 6.7 | 3.0             | 1.6                   | 1000pcs       |
| MWS-A-9.1       | 9.1  | 8.2 | 3.0             | 1.6                   |               |
| MWS-A-11.2      | 11.2 | 9.4 | 3.0             | 1.6                   |               |
| MWS-A-13.0      | 13.0 | 9.4 | 3.0             | 1.6                   |               |
| MWS-B-7.3       | 7.3  | 6.7 | 3.0             | 2.4                   |               |
| MWS-B-9.1       | 9.1  | 8.2 | 3.0             | 2.4                   |               |
| MWS-B-11.2      | 11.3 | 9.4 | 3.0             | 2.4                   | 1000pcs       |
| MWS-B-13.0      | 13.0 | 9.4 | 3.0             | 2.4                   |               |

单位/Unit:mm

| 型 号<br>Item No. | A    | B   | 孔径<br>Hole dia. | 板厚<br>Board thickness | 包装<br>Packing |
|-----------------|------|-----|-----------------|-----------------------|---------------|
| MWS-A2-7.3      | 7.3  | 6.7 | 3.5             | 1.6                   | 1000pcs       |
| MWS-A2-9.1      | 9.1  | 8.2 | 3.5             | 1.6                   |               |
| MWS-A2-11.2     | 11.2 | 9.4 | 3.5             | 1.6                   |               |
| MWS-A2-13.0     | 13.0 | 9.4 | 3.5             | 1.6                   |               |
| MWS-B2-7.3      | 7.3  | 6.7 | 3.5             | 2.4                   |               |
| MWS-B2-9.1      | 9.1  | 8.2 | 3.5             | 2.4                   |               |
| MWS-B2-11.2     | 11.3 | 9.4 | 3.5             | 2.4                   |               |
| MWS-B2-13.0     | 13.0 | 9.4 | 3.5             | 2.4                   |               |

## RCCN 日成NWS/LWS型夹线套Narrow Wire Saddle-Arrowhead

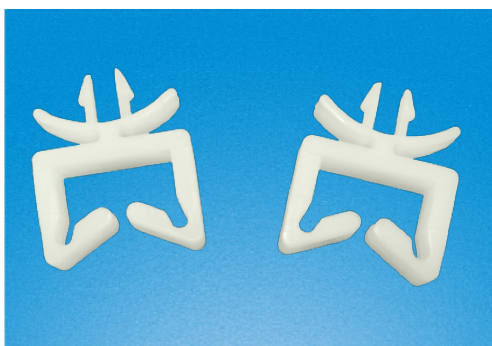

单位/Unit:mm

| 型 号<br>Item No. | A    | 孔径<br>Hole dia. | 板厚<br>Board thickness | 包装<br>Packing |
|-----------------|------|-----------------|-----------------------|---------------|
| NWS-13          | 13.0 | 4.8             | 1.6                   | 1000pcs       |
| NWS-18          | 18.0 | 4.8             | 1.6                   |               |
| NWS-26.9        | 26.9 | 4.8             | 1.6                   |               |
| NWS-34.8        | 34.8 | 4.8             | 1.6                   |               |

| 型 号<br>Item No. | A    | 孔径<br>Hole dia. | 板厚<br>Board thickness | 包装<br>Packing |
|-----------------|------|-----------------|-----------------------|---------------|
| LWS2-13.0       | 13.0 | 4.8             | 1.6                   | 1000pcs       |
| LWS2-18.0       | 18.0 | 4.8             | 1.6                   |               |
| LWS2-27.2       | 27.2 | 4.8             | 1.6                   |               |
| LWS2-35.1       | 35.1 | 4.8             | 1.6                   |               |

