




D07 motor controller transition line

Low pressure transition line, new energy automotive wiring harness processing

- 1. The basic size deviation of the wire conforms to the relevant regulations of QC / T 29106;
- 2. Car special chip connector technical conditions in line with QC / T 417.1-417.5;
- 3. Terminal crimp firmly without error, open circuit, short circuit, conduction rate of 100%; terminal crimping, cable connector in line with QCn29009, QCn29010;
- 3. The remaining performance in line with QC / T 29106 automotive low-voltage wire harness technical conditions;
- 4. All conductors comply with JASOD611 regulations;
- 5. Tape temperature, acid, oil and other properties in line with ST / T 9167.12;
- 6. Flame-proof bellows, lightweight wear-resistant, -40 °C -120 °C deformation.

Harness processing automotive wiring harness wiring harness

Specification

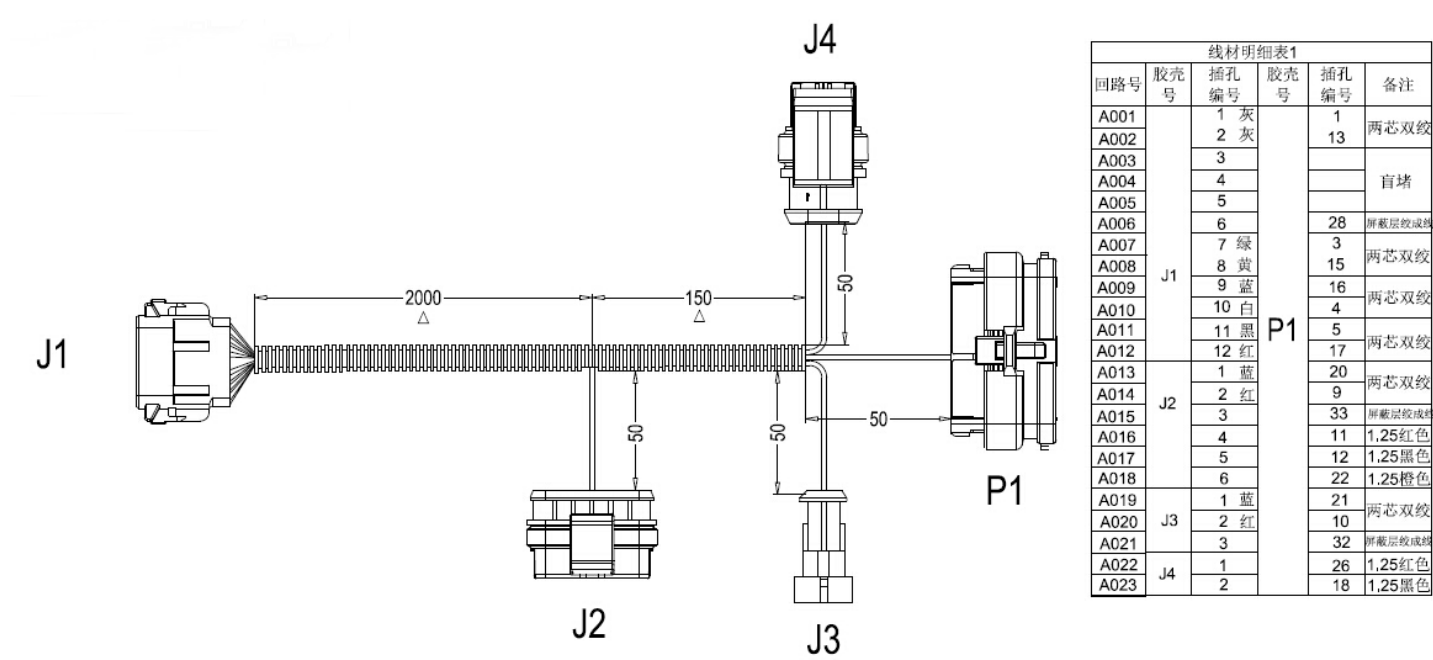

Product Show

RCCN[®]**RCCN**[®]