



High temperature resistant split nylon hose

High temperature resistant split nylon hose


Compliance with European standards
Material: high temperature fluorinated plastic
Temperature class: -200°C to 260°C
Size range: inner diameter from 4.5mm to 19mm
Color: black tube with yellow line
Flame retardant: UL94-v0
Features: suitable for harsh high temperature environment, excellent material corrosion resistance, durability, impact resistance
Purpose: It can protect wires and cables from external wear and insulation carrying capacity, and is not easy to deform. This product has good temperature resistance.
Mainly used in machinery manufacturing, electrical insulation protection, lighting equipment, automobile manufacturing, aviation equipment, subways, trains, automation control and other industries.



High temperature resistant split nylon hose

Specification

RCCN High temperature resistant split nylon hose

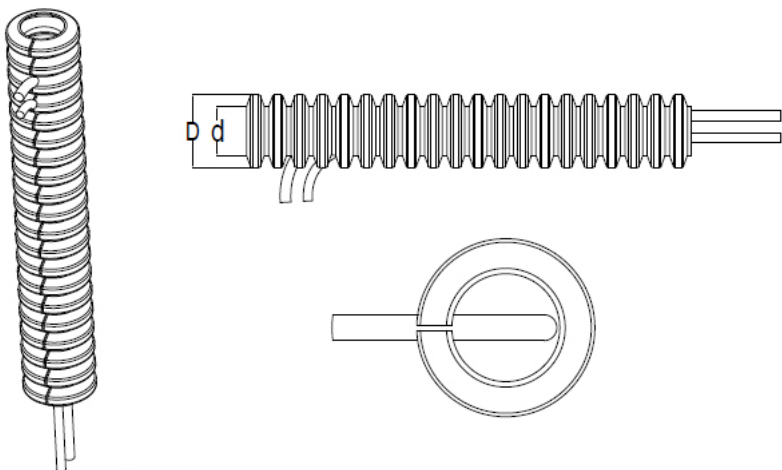

Material: high temperature fluorinated plastic
Temperature: -200° C to 260° C
Product: Conforms to European standards
Uses: It can protect wires and cables from external wear and insulation. It is mainly used in automotive wiring harness industry. This product has good temperature resistance.

black HT240	blackHT240Break open	d Minimum inner diameter mm	D outside diameter mm	package
BG-04.5BH	BGR-04.5BH	4.50	7.20	100
BG-06BH	BGR-06BH	6.65	9.60	100
BG-09BH	BGR-09BH	9.40	13.25	100
BG-11BH	BGR-11BH	12.30	16.40	50
BG-13BH	BGR-13BH	14.05	18.40	50
BG-16BH	BGR-16BH	16.35	21.15	50
BG-19BH	BGR-19BH	19.25	24.00	50

Product Show

High and low temperature bellows

Compliance with European standards

Open style, closed style





Product Application

